

Hardening HSMs for Banking-Grade Crypto Wallets


JP Aumasson, Taurus



Whois

JP

- Taurus co-founder & CSO
- Cryptographer since ~2006
- X/@veorq
- <https://aumasson.jp>

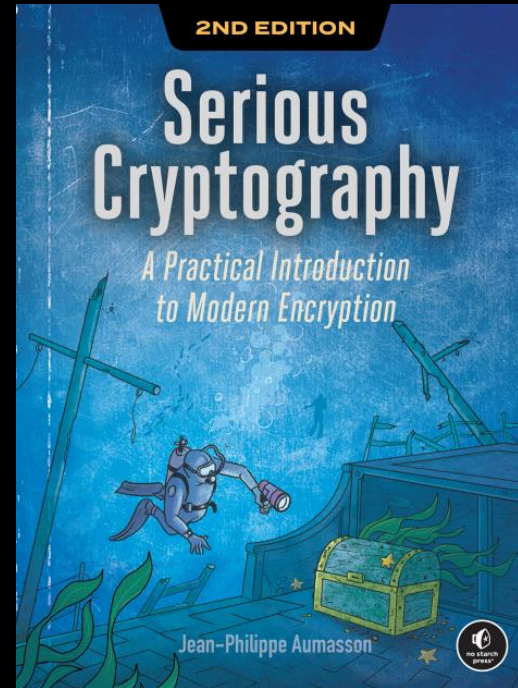

TAURUS

Crypto asset custody & issuance for banks (taurushq.com)

Regulated, running a marketplace for tokenized assets (t-dx.com)

In Geneva, Zurich, London, Paris, Vancouver, Dubai

Outline

1. What is really an HSM?
2. Security and crypto internals
3. Attack surface and hardening
4. Best practices & a note on cloud HSMs

Disclaimer: This is based on our experience over 7 years with 3 HSM models, deployed in production on-prem or managed. YMMV.

T AURUS

**0. How many of you have used
an HSM before?**



T AURUS

1. What is really an HSM?

Hardware security module (HSM)

“A dedicated crypto processor that is specifically designed for the protection of the crypto key lifecycle” (HSM vendor)

Enterprise/cloud HSMs usually 1RU or PCIe card form factor


The actual HSM is the module in the appliance/card



HSM purpose

Store **secret keys** for crypto operations:

- Signature, decryption, symmetric encryption, MAC

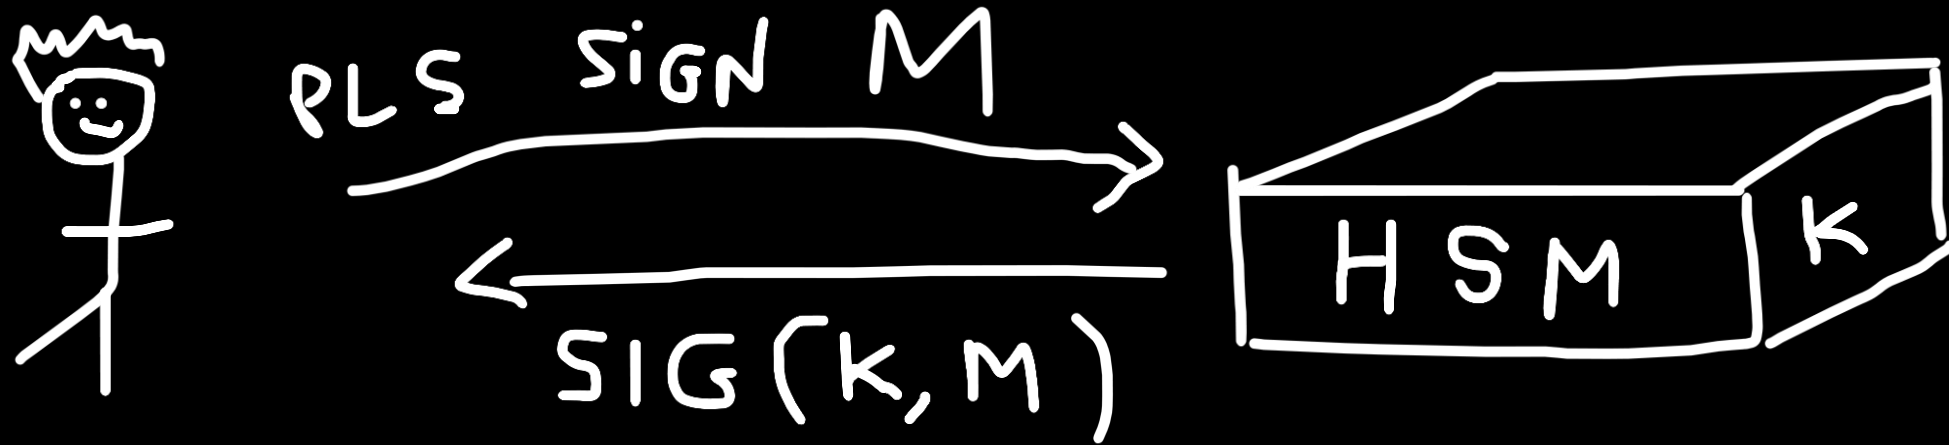

High-assurance domain thanks to isolation & anti-tampering
Protect keys in case of servers/workstations compromise

HSM use case examples

- **Blockchain** transaction signing and TEE
- Code signing (HSM mandatory for MS Win apps)
- Database encryption/decryption (usually via KEKs)
- PKI root of trust (for CAs, enterprise PKIs, etc.)



HSM interfaces

Crypto interface over **PCIe** or **USB**, **TCP/IP** if network-attached

Admin interface over serial port, **SSH**, **HTTP/REST + TLS**, **GUI**

The following top-level commands are available:

Name	(short)	Description
client	c	> Client
exit	e	Exit  Shell
help	he	Get Help
hsm	hs	> Hsm
my	m	> My
network	ne	> Network
ntls	nt	> Ntls
package	pac	> Package
partition	par	> Partition
service	se	> Service
status	st	> Status
sysconf	sysc	> Sysconf
syslog	sysl	> Syslog
token	t	> Token
user	u	> User
webserver	w	> Webserver

Syntax: partition

The following subcommands are available:

Name	(short)	Description
create	cr	Add Partition
init	i	> Init
resize	resl	Resize Partition Storage Space
rename	ren	Rename Partition
createChallenge	createC	Create Crypto Officer or Crypto User challenge
activate	a	Cache Partition PED key data
deactivate	dea	Decache Partition PED key data
list	l	List Partitions
show	sh	Get Partition Information
showContents	showC	Get Partition Objects
showPolicies	showP	Get Partition Policies
changePolicy	changePo	Set Partition Policy Value
changePw	changePw	Set Partition Password
delete	del	Delete Partition
clear	cl	Delete Partition Objects
backup	b	Backup Partition
restore	rest	Restore Partition
stcIdentity	st	Secure Trusted Channel Configuration

The background of the slide is a surreal, dimly lit room. The walls and ceiling are a deep, dark red, with heavy red curtains hanging from the top. The floor is covered in a black and white zigzag or chevron pattern that creates a strong sense of perspective and depth, leading the eye towards a dark doorway in the distance. The lighting is low, with some light filtering through the curtains and the doorway, creating a mysterious and somewhat unsettling atmosphere.

TTAAURUS

2. Security and crypto internals

Security mechanisms (1/5)

- Local isolation (slots aka partitions)

HSM Partitions

HSM Partitions are independent logical HSMs that reside within the SafeNet HSM inside, or attached to, your host computer or appliance. Each HSM Partition has its own data, access controls, security policies, and separate administration access for at least some roles, independent from other HSM partitions (if your HSM supports more than one). Depending on the product, the HSM can contain multiple HSM partitions, and each partition can be associated with one or more Clients. Each HSM Partition has a special administrative account or role, who manages it.

Partition Roles ▲

Logging In to the Application Partition

Initializing Crypto Officer and Crypto User Roles for an Application Partition

Changing a Partition Role Credential

Resetting the Crypto Officer, Limited Crypto Officer, or Crypto User Credential

Activation on Multifactor Quorum-Authenticated Partitions

Security mechanisms (2/5)

- Local isolation (slots aka partitions)
- RBAC, ABAC-ish model (with per-slot roles)

User Roles

Administration Security Officer (ASO)

Administrator

Security Officer (SO)

Token Owner (User)

Unauthenticated Users

Administration Security Officer (ASO)

This user knows and can present the Admin Token SO PIN. The ASO's main role is to introduce the Administrator to the module. The following services are available to the ASO:

- > Set the initial Administrator PIN value (ASO cannot change it later)
- > Set the CKA_TRUSTED attribute on a Public object
- > Set the CKA_EXPORT attribute on a Public object
- > Exercise cryptographic services with Public objects
- > Create, destroy, import, export, generate and derive Public objects
- > Can change his/her own PIN

Administrator

This user knows and can present the Admin Token User PIN. The following services are available to the Administrator:

- > Set or change Real Time Clock (RTC) value
- > Read the System Event Log
- > Purge a full System Event Log
- > Configure the Transport Mode feature
- > Specify the security policy of the HSM
- > Create new SafeNet ProtectToolkit-C slots/tokens and specify their labels, SO PINs, and minimum PIN Length
- > Initialize smart cards and specify their labels and SO PINs
- > Destroy individual SafeNet ProtectToolkit-C slots/tokens
- > Erase all HSM secure memory, including all PINs and User Keys
- > Perform firmware upgrade operations
- > Manage Host Interface Master Keys
- > Exercise cryptographic services with Public objects on the Admin Token

Security mechanisms (3/5)

- Local isolation (slots aka partitions)
- RBAC model (with per-slot roles)
- PKCS#11 Cryptoki API

Bit Flag	Mask	Meaning
CKF_HW	0x00000001	True if the mechanism is performed by the device; false if the mechanism is performed in software
CKF_ENCRYPT	0x00000100	True if the mechanism can be used with C_EncryptInit
CKF_DECRYPT	0x00000200	True if the mechanism can be used with C_DecryptInit
CKF_DIGEST	0x00000400	True if the mechanism can be used with C_DigestInit
CKF_SIGN	0x00000800	True if the mechanism can be used with C_SignInit

5.9 Decryption functions

Cryptoki provides the following functions for decrypting data:

◆ C_DecryptInit


```
CK_DEFINE_FUNCTION(CK_RV, C_DecryptInit)(  
    CK_SESSION_HANDLE hSession,  
    CK_MECHANISM_PTR pMechanism,  
    CK_OBJECT_HANDLE hKey  
);
```

C_DecryptInit initializes a decryption operation. *hSession* is the session's handle; *pMechanism* points to the decryption mechanism; *hKey* is the handle of the decryption key.

The **CKA_DECRYPT** attribute of the decryption key, which indicates whether the key supports decryption, MUST be CK_TRUE.

Security mechanisms (4/5)

- Local isolation (slots aka partitions)
- RBAC model (with per-slot roles)
- PKCS#11 Cryptoki API
- FIPS 140-2/3 certified crypto and anti-tampering controls

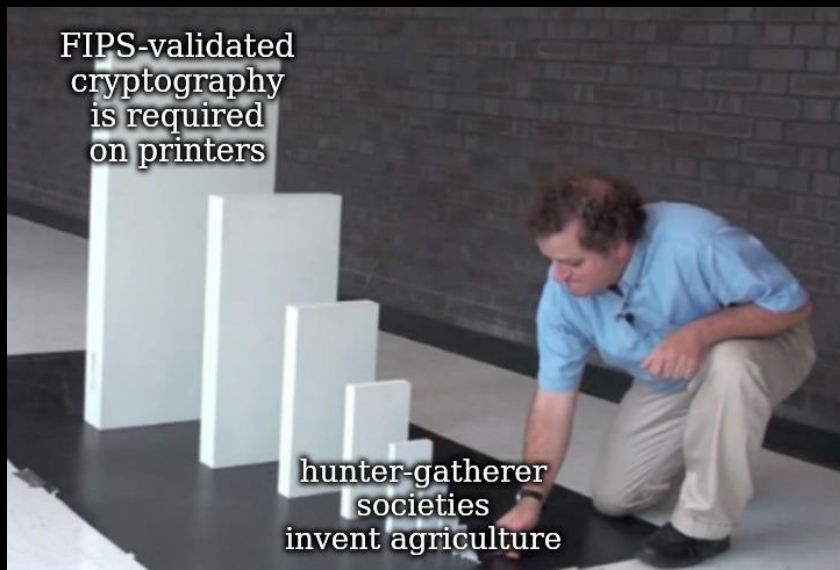

Security mechanisms (5/5)

- Local isolation (slots aka partitions)
- RBAC model (with per-slot roles)
- PKCS#11 Cryptoki API
- FIPS 140-2/3 certified crypto and anti-tampering controls

May NOT include:

- Software exploit mitigations like ASLR and DEP
- Remote attestation mechanism

Internals overview (1/2)

- System-on-chip with a PowerPC core and crypto accelerators
- Some minimal Linux distrib and some bootloader
- Crypto software libraries
- Signed firmware updates (encrypted for some models)

Libsodium	ISC (https://www.isc.org)
Linux kernel	GPL-2.0 with exceptions
Linux-misc	GPL-2.0 (https://www.gnu.org/licenses/gpl-2.0.html)
OpenSSL	OpenSSL (http://www.openssl.org)
Protobuf	BSD-3-Clause "New" or "revised"
Protobuf-c	BSD 2-clause "Simplified"
Protocol Buffer Java Util Package	BSD-3-Clause "New" or "revised"
U-boot	GNU GPL v2.0 only (http://www.gnu.org/licenses/gpl-2.0.html)

```
23
24 # Start PCSC:
25 exec /sbin/pcscd
26
27 # Launch the HSM app, and wait for it to die.
28 exec /sbin/HSM
29
30 sendlog_text "LOG(CRITICAL)  HSM crashed:"
31
32 # Tell host that HSM quit:
33 sendlog_text "HSM terminated"
```

Internals overview (2/2)

- Crypto support: mainly FIPS incl. legacy algorithms
- “True RNG” seeding a NIST 800-90A DRBG

- Full Suite B support
- Asymmetric: RSA, DSA, Diffie-Hellman, Elliptic Curve Cryptography (ECDSA, ECDH, Ed25519, ECIES) with named, user-defined and Brainpool curves, KCDSA and more
- Symmetric: AES, AES-GCM, DES, Triple DES, ARIA, SEED, RC2, RC4, RC5, CAST, and more
- Hash/Message Digest/HMAC: SHA-1, SHA-2, SM3 and more
- Key Derivation: SP800-108 Counter Mode
- Key Wrapping: SP800-38F
- Random Number Generation: designed to comply with AIS 20/31 to DRG.4 using HW based true noise source alongside NIST 800-90A compliant CTR-DRBG

A surreal, dimly lit room with heavy red curtains hanging from the ceiling. The floor is covered in a black and white zigzag pattern that creates a strong sense of depth and perspective, leading the eye towards a dark doorway in the distance. The lighting is low, with some light filtering through the curtains and from the doorway.


T^AURUS

3. Attack surface and hardening

Custom modules

- Firmware extension software component loaded by users
- Replace the original firmware's init()
- Must be developed C, using the vendor's SDK
- Size limitation (ex: 8MB)

```
static int handle_init(Message_Handle token, Messages__HSMRequest *request) {  
    if(request->checksum.data == NULL || request->checksum.len != 32) {  
        return pack_reply(token, "invalid checksum", MESSAGES__HSMRESPONSE__CODE__Failure, NULL, 0, 0, NULL, NULL);  
    }  
    if(request->init == NULL || request->init->length == 0 || request->init->data.data == NULL || request->init->data.len == 0) {  
        return pack_reply(token, "no init payload", MESSAGES__HSMRESPONSE__CODE__Failure, NULL, 0, 0, NULL, NULL);  
    }  
    uint32_t len = request->init->length;  
    if(len > 1000000) {  
        return pack_reply(token, "invalid total size: max 1000000 bytes", MESSAGES__HSMRESPONSE__CODE__Failure, NULL, 0, 0, NULL, NULL);  
    }  
    if(request->init->data.len > len) {  
        return pack_reply(token, "invalid payload: longer than total size", MESSAGES__HSMRESPONSE__CODE__Failure, NULL, 0, 0, NULL, NULL);  
    }  
}
```

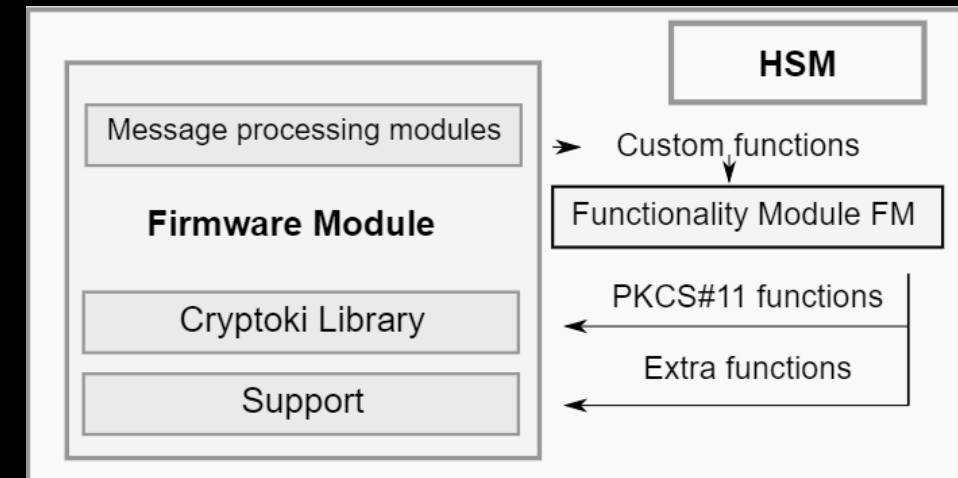

What could go wrong (1/3)

- Compromised caller creds = free HSM requests (no filtering)
- PKCS#11 intrinsic flaws and limitations (see Ledger's paper)
- Bugs in the PKCS#11 implementation and HSM runtime

Yubico YubiHSM PKCS#11 Library Vulnerability (CVE-2023-39908)

Aug 14, 2023 • Christian Reitter
ID: CVE-2023-39908

Related articles: [Yubico libykpiv Vulnerabilities II](#) • [Yubico yubihsm-shell Vulnerability \(CVE-2021-43399\)](#) • [Yubico libyubihsm Vulnerabilities \(CVE-2021-27217, CVE-2021-32489\)](#)

Heiko Schäfer discovered a new security issue in the Yubico `yubihsm_pkcs11.so` driver library, which we disclosed together to Yubico. The YubiHSM PKCS#11 client-side library is designed to interact with Yubico HSM2 hardware security modules. Due to flaws in the memory handling, the library code accidentally returns 8192 bytes of previously used process memory under some circumstances. This impacts the memory confidentiality of the calling program for some usages.

<https://blog.inhq.net/posts/yubico-yubihsm-pkcs-vuln/>

Everybody be cool, this is a robbery!

Jean-Baptiste Bédrune et Gabriel Campana
jean-baptiste.bedrune@ledger.fr
gabriel.campana@ledger.fr

Ledger Donjon

SSTIC 2019

What could go wrong (2/3)

- Known bugs in outdated OSS components (regreSSHion?)
- Cross-slot attacks (DoS, info leak, code exec?)
- Malicious custom module / supply-chain issues
- RNG issues (remember ROCA?) or side channels (Yubikeys..)

Trusted FM binary creation

This process involves **Security Auditor**, after their testifying of the build environment secure identifier.

The outcome of this process is a **trusted FM binary**, or a compiled version of an audited version of the FM.

All operations are performed under the supervision of Security Auditor, **who records the operations performed**, and any failure or unexpected event.

What could go wrong (3/3)

With custom modules:

- Removing a directory from the FS crashes if the name ends with “/”
- Logging "too much" (1 log per message) freezes the HSM, needing a power-cycle
- Inconsistent crypto interface between firmware versions

Without custom modules:

- Client-side segfaults with certain elliptic curve crypto interfaces

HSM hardening

A quick tour of measures proposed to harden HSMs

- Deployed in production
- Known tricks for “power users”
- Most won’t work with cloud HSMs



1/6: Attack surface reduction

PKCS#11 API override, to only allow “authorized” usage/args
But vendors can add more calls...

```
FM_RV Startup() {
    CprovFnTable_t *fn_table = OS_GetCprovFuncTable();
    if(fn_table == NULL) {
        return 2;
    }

    fn_table->C_GetAttributeValue = GetAttributeValueOverride; //GetAttribute because it can be used to ge
    fn_table->C_WrapKey=WrapKeyOverride; //WrapKey because we don't want wrapped versions getting out
    fn_table->C_DeriveKey=DeriveKeyOverride; //DeriveKey because BIP32
    fn_table->CT_CopyObject=CTCopyObjectOverride; //CopyObject because if Sensitive is missing, one could
    fn_table->C_CopyObject=CopyObjectOverride; //Same but not across sessions
    fn_table->C_SignInit=SignInitOverride; // Prevent some hmacs from outside (for exchanges we know about)
    fn_table->C_DestroyObject=DestroyObjectOverride; // Otherwise people can just delete data and roll back to
    fn_table->C_SetAttributeValue=SetAttributeValueOverride; // Otherwise people can just overwrite data and r
    printf("Registering taurus FM with chunking support\n");
    initialized = false;
    return FMSW_RegisterDispatch(FM_NUMBER_CUSTOM_FM, handler);
}
```

2/6: Enforce secure configuration

Custom code can enforce that attributes of PKCS#11 objects are the most restrictive, and stop its operations otherwise

Ex: Ensure that secret key are marked as CKA_SENSITIVE and not CKA_EXTRACTABLE.

If available, use directly the filesystem (rather than PKCS#11 objects)

```
CK_ATTRIBUTE len_attrs[] = {  
    {CKA_VALUE_LEN, &tmplen, sizeof(tmplen)},  
    {CKA_SENSITIVE, &is_sensitive, sizeof(is_sensitive)},  
    {CKA_PRIVATE, &is_private, sizeof(is_private)},  
    {CKA_MODIFIABLE, &is_modifiable, sizeof(is_modifiable)},  
    {CKA_WRAP, &is_wrap, sizeof(is_wrap)},  
    {CKA_EXPORT, &is_export, sizeof(is_export)},  
    {CKA_IMPORT, &is_import, sizeof(is_import)},  
    {CKA_UNWRAP, &is_unwrap, sizeof(is_unwrap)},  
    {CKA_EXTRACTABLE, &is_extractable, sizeof(is_extractable)},  
    {CKA_EXPORTABLE, &is_exportable, sizeof(is_exportable)},  
    {CKA_DERIVE, &is_derive, sizeof(is_derive)},  
    {CKA_ENCRYPT, &is_encrypt, sizeof(is_encrypt)},  
    {CKA_DECRYPT, &is_decrypt, sizeof(is_decrypt)},  
    {CKA_SIGN, &is_sign, sizeof(is_sign)},  
    {CKA_VERIFY, &is_verify, sizeof(is_verify)},  
    {CKA_CLASS, &obj_class, sizeof(obj_class)},  
};
```

3/6: In-HSM business logic

Move business logic from servers/VMs to the HSM

Ex: Create blockchain transactions (signature, payload) after enforcing a multi-sig quorum and governance rules


Benefits:

- Computation integrity and confidentiality protected
- Can interact with in-HSM crypto objects

Risks: Bugs leading to secrets leak or code execution

4/6: Application-level *AC

- Roles = **users** (request approvers), **admins** (rules approvers)
- Admins sign rules defining authorized quorums
- Users and admins sign with **hardware tokens**

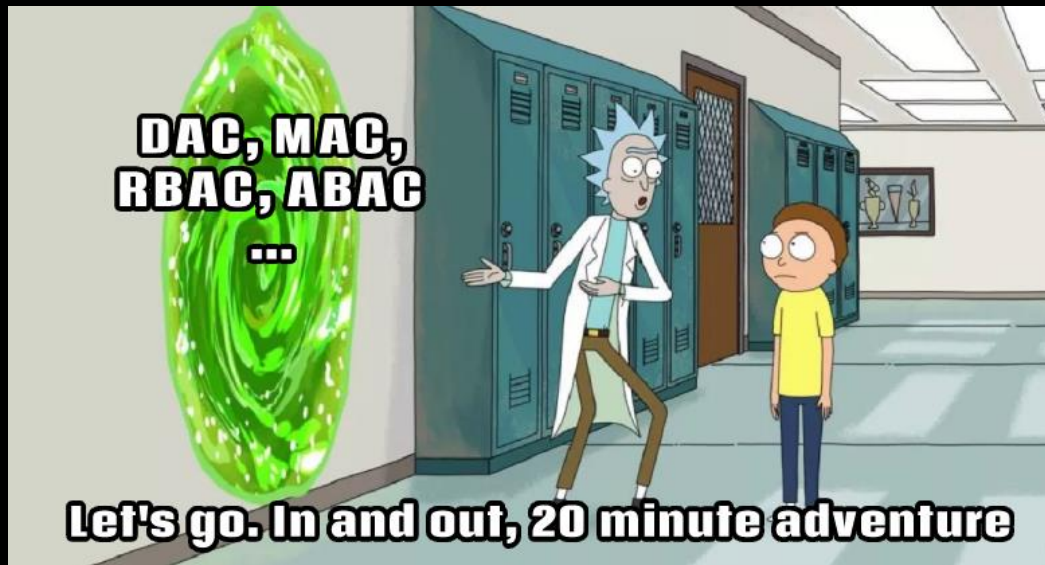


Only admin pubkeys in the HSM

Tricks needed to prevent replay and downgrade

5/6 Application-level secure channel

HSMs may support secure channels, but only at the network level, or offer insufficient security (anon DH in old HSMs)

If the consumer of the HSM response is not the host talking to the HSM, application-level security is needed (aka e2ee)

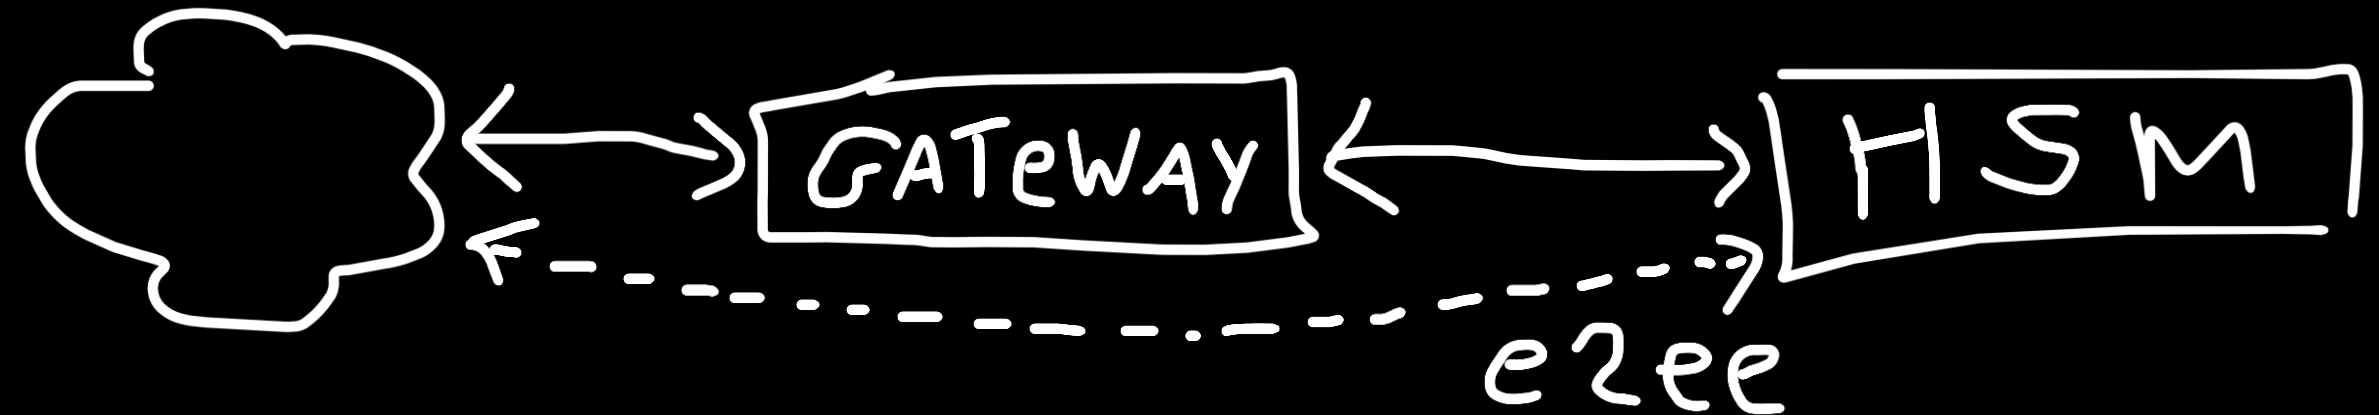

6/6: Minimize black-boxing

The proprietary HSM code is generally not open-source, therefore harder to review for bugs, let alone fix them

Alternative: integrate code from auditable/OSS libraries via the custom modules (may need tweaks/optimization/stripping)

Exception: **randomness:** HSM's PRNG and entropy sources
Can post-process with a custom DRBG

A surreal, dimly lit room with heavy red curtains hanging from the ceiling. The floor is covered in a black and white zigzag pattern that creates a strong sense of depth and perspective, leading the eye towards a dark doorway in the distance. The lighting is dramatic, with warm red tones from the curtains and cooler white tones from the floor pattern.

T^AURUS

4. From stateless to stateful

Why a state?

Stateless HSMs are convenient and simple to manage

- Multiple instances behind a load balancer
- Immutable state configured once in a key ceremony

However, **statefulness** often needed for

- Anti-replay, anti-downgrade (ex: monotonous counter)
- Enforcement of security policies (ex: via timestamps)

Challenges of HSM states

- HSMs' storage is limited, and I/O is slow
- High-availability needs at least 2 redundant HSMs
- State bounded in size (must fit in a ~2MB message)
- State transitions must be verifiable

Solution: **trees!**



The background of the slide is a surreal, dimly lit room. The walls and ceiling are a deep, dark red. Heavy, dark red curtains hang from the ceiling, framing a central doorway in the distance. The floor is covered in a black and white zigzag or chevron pattern that creates a strong sense of perspective, drawing the viewer's eye towards the center of the room. The lighting is low, with some light filtering through the curtains and from the doorway, creating a mysterious and dramatic atmosphere.

TAURUS

5. Best practices, cloud HSMs

Best practices (1/2)

Software defense

- Keep the HSM firmware updated
- Tighten PKCS#11 attributes (to the minimum needed)
- Enable security features (secure channel)
- Custom code: minimize dependencies
- Custom code: have solid build/deploy integrity (see [SLSA.dev](#))

Best practices (2/2)

Access control

- Segregate accesses and credentials (admin/SO, slot user/SO)
- Minimize network exposure (no internet facing, whitelisting)

Key management

- Generate critical keys in key ceremonies (in- or off-HSM?)
- Have reliable & tested back-ups and DR procedures

Use **HSM back-up/cloning?**

On cloud HSM aka HSMaaS

Convenient cloud-based systems, notably as KMS back-end

Limitations:

- Access may be indirect via some cloud middleware
- May be multi-tenant, sharing hardware with other users
- Limited capability to configure the HSM and PKCS#11 settings
- Impossible to run custom code
- How to be sure it's really an HSM and not an emulator?

Conclusion

HSMs + in-HSM custom logic is a powerful setup suitable for various high-assurance security systems, but requires significant investment in

- Bespoke hardening to reduce the attack surface
- Management of compute and storage limitations
- SDLC integrity and QA
- HSM model/vendor-specific shenanigans

The background of the slide is a photograph of a stage. It features heavy red curtains on both sides, creating a sense of depth. The floor is covered in a black and white zigzag or chevron pattern. The lighting is dim, with some spotlights visible on the curtains.

TAURUS

Faleminderit!

A joint work with the Taurus team

Acknowledgements:

André S., Antony V., Mattia T., Ryan H., Stefano Z., Tal B.

<https://taurushq.com>